

5279-C

15 Amp, 125 Volt, NEMA 5-15R, 2P, 3W, Flanged Outlet Receptacle, Straight Blade, Industrial Grade, Grounding, , Back Wired, Thermoplastic Nylon Strap - White

Leviton's Straight Blade Power Outlets are suitable for industrial indoor and outdoor applications. Glass-filled thermoplastic cover and plate provides outstanding impact resistance and durability. Stainless steel external hardware resists corrosive effects of moisture as dual gaskets, one under plate and one under lid, provide for a superior weather-resistant fit.

Technical Information

Electrical Specifications

Amperage : 15 A

Current Interrupting : Certified for current interrupting at full rated current

Dielectric Voltage : Withstands 2000V per UL498

Grounding : Grounding

Pole : 2

Temperature Rise : Max 30C after 250 cycles OL at 200 percent rated current

Voltage : 125 VAC

Wire : 3

Environmental Specifications

Environment : Dry

Flammability : Rated V-2 per UL 94

Operating Temperature : -40°C to 60°C

Material Specifications

Assembly Screws : Steel, Zinc Plated

Blades/Contacts : Solid Brass

Body Material : Super Tough Nylon

Color : White

Terminal Screws : Brass

Wire Module : Nylon

Mechanical Specifications

Product ID : Ratings and NEMA I.D. permanently marked on device

Terminal Accom. : 18-10 AWG

Terminal ID : Brass-Hot, Green-Ground, Silver-Neutral

Torque Range : 10-14 in-lbs

Product Features

Brand : Black and White

Color : White

Device Type : Straight Blade Flanged Inlet

Face Material : Nylon

NEMA : 5-15R

Strap Material : Thermoplastic Nylon

Termination : Back

Standards and Certifications

ANSI : C-73

CSA C22.2 No. 42 : File LR-406

NEMA : WD-6

NOM : 057

UL 498 : File E13399

UL Fed Spec WC-596 : File E13393

Warranty : Limited Lifetime Warranty Warranty




UPC Code : 078477795408


Country Of Origin : United States



Dimensional Diagram

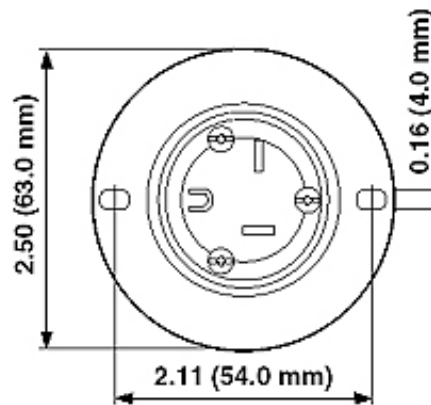

Wiring Diagram

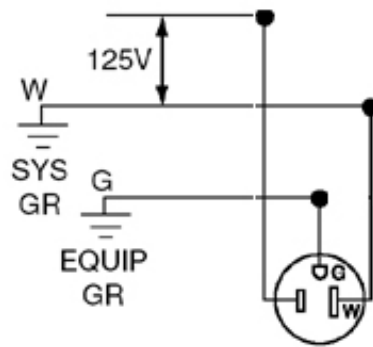

5-15R

SPECIFICATION SUBMITTAL

JOB NAME:	CATALOG NUMBERS:	
JOB NUMBER:		

Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday):

+1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·

FAX: +1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-

1797 · www.leviton.com.mx

Visit our Website at: www.leviton.com

© 2018 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:

www.leviton.com/international/contacts/

