



Country Of Origin: Mexico

1221-2KL

20 Amp, 120/277 Volt, Key Locking Single-Pole AC Quiet Switch, Extra Heavy Duty Spec Grade, Self Grounding, Back & Side Wired

Levitons Extra Heavy-Duty AC Key Locking Switches are the perfect choice for public use areas in schools/universities and pediatric facilities. Operable only with the mating key, it prevents unauthorized personnel from turning the switch ON or OFF.

Technical Information

AC Horsepower Ratings

HP Rating: 1HP-120V 2HP-240V-277V

Max. Amperage: 16 Amp Electrical Specifications

Amperage: 20 A

Dielectric Voltage: Withstands 1500V

for 1 minute

Endurance: 50,000 cycles minimum

Grounding: Self-Grounding

Overload UL20 Test: 100 cycles of OL

at 4.8 times rated current

Temperature Rise: Maximum 30

degrees C rise

Voltage: 120/277 VAC

Environmental Specifications
Flammability: Rated V-2 per UL 94

Operating Temperature: -40°C to 65°C

Material Specifications

Body Material: Thermoplastic

Strap Material: Steel

Mechanical Specifications

Product ID: Ratings are permanently

marked on device

Terminal Accom.: 14-#10 AWG back wired; #14-#12 AWG side wired

Terminal ID: Brass-Hot Black-Hot White-Neutral Green-Gnd

Termination: Back or Side Wire

Torque Range: 12-14 inch pounds

Product Features

Device Type: Key Lock Barrel Switch

Function: Single-Pole

Grade: Extra Heavy-Duty Industrial

Specification Grade

Grounding: Self-Grounding

HP Rating: 1HP-120V 2HP-240V-277V

Strap Material: Steel

Standards and Certifications


ANSI: C-73

CSA C22.2 No. 111: File #152105


NEMA: WD-1 & WD-6

NOM: 057

UL Standard: UL 20 **Warranty:** 10 Year Limited

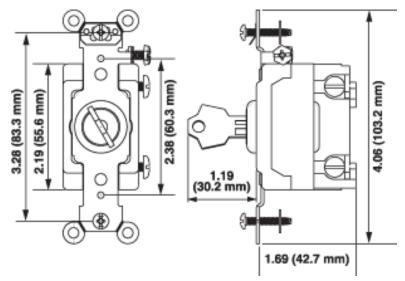

Wiring Diagram Single Pole



SPECIFICATION SUBMITTAL

JOB NAME:	CATALOG NUMBERS:
JOB NUMBER:	

Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): +1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 · FAX: +1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-1797 · www.leviton.com.mx

Visit our Website at: www.leviton.com

© 2018 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to: www.leviton.com/international/contacts/

