

5206





UPC Code: 07847781120

Country of Origin: Please Contact Customer

Service

NEMA: 10-50R



Straight Blade Wiring Devices

Brand Features

Built of durable thermoplastic, Leviton Power Receptacles — come equipped with heavy-gauge, double-wire copper alloy contacts. To ensure correct and speedy wiring, terminals have ID markings.

Item Description

50 Amp, 125/250 Volt, NEMA 10-50R, 3P, 3W, Flush Mtg Receptacle, Straight Blade, Industrial Grade, Grounding, AL-CU, Side Wired, Steel Strap - Black

Technical Information

AC Horsepower Ratings
At Rated Voltage: 3 HP

Electrical Specifications
Grounding: Non-Grounding
Amperage: 50 Amp
Voltage: 125/250 Volt
NEMA: 10-50R

Pole: 3 Wire: 3

Dielectric Voltage: Withstands 2000V per

JL498

Current Limiting: Full Rated Current Temperature Rise: Max 30C after 50 cycles OL at 150 percent rated current

Environmental Specifications

Flammability: Rated V-2 per UL94

Operating Temperature: -40C to 60C

Material Specifications
Face Material: Nylon
Body Material: Nylon

Line Contacts: Brass Double-Wipe **Strap Material:** Galvanized Steel

Color: Black

Mechanical Specifications

Terminal ID: Brass-Hot, Green-Ground,

White-Neutral

Terminal ID: Brass-Hot, Green-Ground,

Silver-Neutral

Terminal Accom.: Up to 4 AWG
Product ID: Ratings are permanently

marked on device

Product Features
NEMA: 10-50R
Color: Black

Standards and Certifications


NEMA: WD-6 ANSI: C-73

UL498: File E13399


CSA C22.2 No. 42: File 152105

NOM: 057

Warranty: 10 Year Limited

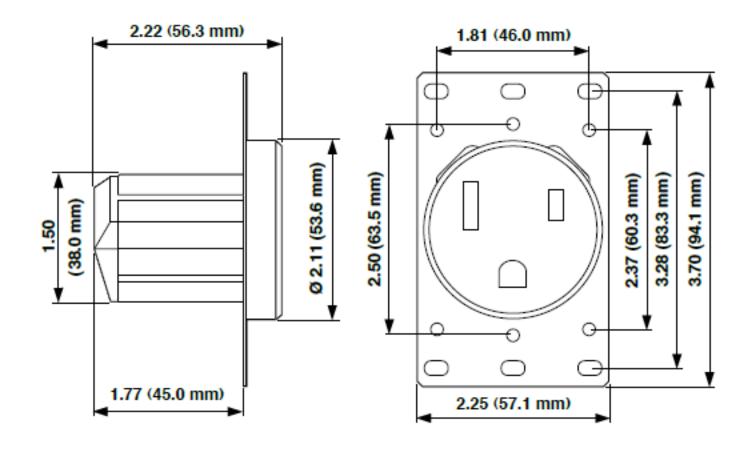

Wiring Diagram



SPECIFICATION SUBMITTAL

JOB NAME:	CATALOG NUMBERS:	
JOB NUMBER:		

Leviton Manufacturing Co., Inc.
201 North Service Road, Melville, NY 11747
Telephone: 1-800-323-8920 · FAX: 1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): 1-800-824-3005

Leviton Manufacturing of Canada, Ltd.165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: 1-800-469-7890 · FAX: 1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V.Lago Tana 43, Mexico DF, Mexico CP 11290 ⋅ Tel.: (+52)55-5082-1040 ⋅ FAX: (+52)5386-1797 ⋅ www.leviton.com.mx

Visit our Website at: www.leviton.com © 2012-2015 Leviton Manufacturing Co., Inc. All rights reserved. Subject to change without notice.

Leviton has a global presence.If you would like to know where your local Leviton office is located please go to: www.leviton.com/international/contacts/

